



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 347 603 A1

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
24.09.2003 Bulletin 2003/39

(51) Int Cl.7: H04L 12/56

(21) Application number: 03251763.3

(22) Date of filing: 20.03.2003

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR
Designated Extension States:
AL LT LV MK

(72) Inventor: Lakkakorpi, Jani
00200 Helsinki (FI)

(74) Representative: Ruuskanen, Juha-Pekka et al
Page White & Farrer,
54 Doughty Street
London WC1N 2LS (GB)

(30) Priority: 22.03.2002 US 105067

(71) Applicant: Nokia Corporation
02150 Espoo (FI)

(54) Simple admission control for IP based networks

(57) A simple admission control mechanism for IP based networks is provided. The decision on whether a new flow is accepted is based on the link load information on the paths from the source to destination. The new flow is accepted when the link load is less than a threshold. When at least one of the links on all of the available paths is larger than the acceptable threshold, access is denied to the flow. More than one threshold level may be used. Under the multiple threshold scenario, the traffic may be divided into different classes. The admission control mechanism helps to ensure a network that is not heavily congested.

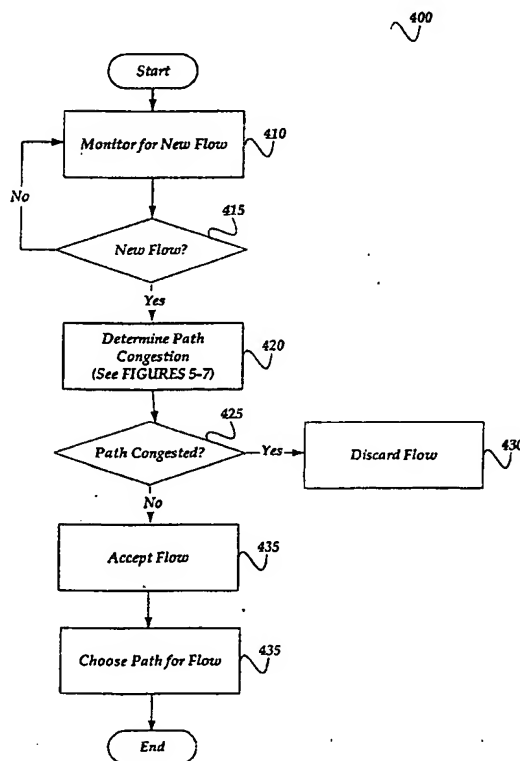


Fig.4

EP 1 347 603 A1

Description

[0001] The present invention relates to IP networks, and more particularly to an admission control mechanism for IP networks.

[0002] The development of mobile communication devices and mobile networks has advanced at a rapid rate. At first, analog mobile networks enabled voice communication and simple paging features. Later, digital mobile networks provided more advanced features for voice and data communication, such as encryption, caller identification and short message service (SMS) text messages. More recently, third generation (3G) mobile IP network technology is being developed to enable users to easily access content rich media, information and entertainment with mobile devices.

[0003] As mobile devices and mobile networks have advanced, and more data has become available to the users, the demand on the networks has continued to increase. The increase in demand can cause a network to become heavily congested.

[0004] One way that has been used to attempt to alleviate congestion on a network is to add more bandwidth. This approach, however, has many drawbacks. Adding more bandwidth is expensive and does not ensure that a network will not become congested. Eventually, all of the available bandwidth will be utilized from the increased demand.

[0005] What is needed is a way to simply determine when a new flow should be accepted into the network in order to avoid congestion. It is with respect to these considerations and others that the present invention has been made.

[0006] The present invention is directed at addressing the above-mentioned shortcomings, disadvantages and problems, and will be understood by reading and studying the following specification.

[0007] According to one aspect of the invention, a simple admission control mechanism is directed at determining when a new flow is accepted into an IP based network.

[0008] According to yet another aspect of the invention, the decision whether to accept a new flow is based on the path congestion for the available paths from the source of the new flow to the destination of the new flow. Each link load within the paths is calculated to determine path congestion. The link load may be real time load for real time traffic, total load for other traffic, and the like. The link load may be any subset of the total load that is based on the number of bytes dequeued from certain DiffServ router output queues for any traffic class. For example, real time load for Expedited Forwarding (EF) traffic, which is mapped to highest priority queue, may be considered to be congested when the threshold is larger than $0.8 \times \text{link bandwidth}$. Other traffic thresholds may be set at higher thresholds, e.g. threshold = $0.95 \times \text{link bandwidth}$.

[0009] When all of the paths are congested, the new

flow is not accepted. When at least one of the paths is not congested, the new flow is accepted.

[0010] According to yet another aspect of the invention, the link load is determined by an exponential averaging equation. A configurable weighting factor may be set depending on how fast the operator desires to react to changes in link loads at each node within the network. A measurement period factor may be set for the period the link load is measured.

[0011] According to still yet another aspect of the invention, the new flow is accepted when the link load is below a predetermined threshold. Several different thresholds may be configured. For example, a different threshold may be used for different classes of service.

[0012] According to a further aspect of the invention, the link loads may be monitored by a dedicated network element, such as a bandwidth broker, or by individual network nodes, such as routers.

FIGURE 1 illustrates an exemplary mobile IP network in which the invention may operate;

FIGURE 2 shows a schematic diagram that illustrates an exemplary system overview in which local area networks and a wide area network are interconnected by routers;

FIGURE 3 is a schematic diagram that shows an exemplary bandwidth broker that is operative to process information relating to the link loads on the network;

FIGURE 4 illustrates an overview of a simple admission control process;

FIGURE 5 shows an exemplary equation for representing link load;

FIGURE 6 shows a process for a simple admission mechanism for an IP based network; and

FIGURE 7 illustrates a simple admission control utilizing a dedicated network element, in accordance with aspects of the invention.

[0013] In the following detailed description of exemplary embodiments of the invention, reference is made to the accompanied drawings, which form a part hereof, and which is shown by way of illustration, specific exemplary embodiments of which the invention may be practiced. Each embodiment is described in sufficient detail to enable those skilled in the art to practice the invention, and it is to be understood that other embodiments may be utilized, and other changes may be made, without departing from the spirit or scope of the present invention. The following detailed description is, therefore, not to be taken in a limiting sense, and the scope of the present invention is defined only by the appended claims.

[0014] Throughout the specification and claims, the following terms take the meanings explicitly associated herein, unless the context clearly dictates otherwise. The term "node" refers to a network element, such as a router, that monitors a load for a link within a path. The

term "link load" refers to the load associated with the node. The term "bandwidth broker" refers to a dedicated network element that knows the topology and link loads associated with the network. The term "flow" means a flow of packets. The term support node refers to both "GGSN" and "SGSN" nodes. The term "user" refers to any person or customer such as a business or organization that employs a mobile device to communicate or access resources over a mobile network. The term "operator" refers to any technician or organization that maintains or services an IP based network. The term "identifier" includes an MSISDN number, an IP address, or any other information that relates to the location or identity of the user. Referring to the drawings, like numbers indicate like parts throughout the views. Additionally, a reference to the singular includes a reference to the plural unless otherwise stated or is inconsistent with the disclosure herein.

Illustrative Operating Environment

[0015] With reference to FIGURE 1, an exemplary mobile IP network in which the invention may operate is illustrated. As shown in the figure, mobile IP network 100 includes mobile station (MS) 105, radio access network (RAN) 110, SGSN 115, core network 120, routers 125_{A-F}, optional bandwidth broker (BB) 300, GGSNs 135_{A-B}, data network 140, and data network 145.

[0016] The connections and operation for mobile IP network 100 will now be described. MS 105 is coupled to radio access network (RAN) 110. Generally, MS 105 may include any device capable of connecting to a wireless network such as radio access network 110. Such devices include cellular telephones, smart phones, pagers, radio frequency (RF) devices, infrared (IR) devices, integrated devices combining one or more of the preceding devices, and the like. MS 105 may also include other devices that have a wireless interface such as Personal Digital Assistants (PDAs), handheld computers, personal computers, multiprocessor systems, microprocessor-based or programmable consumer electronics, network PCs, wearable computers, and the like.

[0017] Radio Access Network (RAN) 110 manages the radio resources and provides the user with a mechanism to access core network 120. Radio access network 110 transports information to and from devices capable of wireless communication, such as MS 105. Radio access network 110 may include both wireless and wired components. For example, radio access network 110 may include a cellular tower that is linked to a wired telephone network. Typically, the cellular tower carries communication to and from cell phones, pagers, and other wireless devices, and the wired telephone network carries communication to regular phones, long-distance communication links, and the like. As shown in the figure, RAN 110 includes routers 125_{A-C}. According to one embodiment of the invention, routers 125_{A-C} may calculate their own link loads as well as process link loads

relating to other nodes on the network. The routers may send a warning message to other routers within the network when its link load exceeds a configurable threshold. When there is at least one link load within each available path from a source to a destination for a new flow that is above the configurable threshold, the new flow attempting to enter the network is rejected. Alternatively, a bandwidth broker, or some other dedicated network element, may be used to process information relating to the link loads of the nodes within the network. Briefly described, BB 300 may be used to monitor and aid in carrying out the simple admission control for IP based networks. According to this particular embodiment, each router informs BB 300 of its link load and receives information relating to the link loads for the other nodes within the network.

[0018] Some nodes may be General Packet Radio Service (GPRS) nodes. For example, Serving GPRS Support Node (SGSN) 115 may send and receive data from mobile stations, such as MS 105, over RAN 110. SGSN 115 also maintains location information relating to MS 105. SGSN 115 communicates between MS 105 and Gateway GPRS Support Node (GGSN)s 135_{A-B} through core network 120. According to one embodiment of the invention, BB 300 communicates with RAN 110 and core network 120.

[0019] Core network 120 is an IP packet based backbone network that includes routers, such as routers 125_{D-F}, to connect the support nodes in the network. Routers are intermediary devices on a communications network that expedite message delivery. On a single network linking many computers through a mesh of possible connections, a router receives transmitted messages and forwards them to their correct destinations over available routes. Routers may be a simple computing device or a complex computing device. For example, a router may be a computer including memory, processors, and network interface units.

[0020] GGSNs 135_{A-B} are coupled to core network 120 through routers 125_{A-C} and act as wireless gateways to data networks, such as network 140 and network 145. Networks 140 and 145 may be the public Internet or a private data network. GGSNs 135_{A-B} allow MS 105 to access network 140 and network 145.

[0021] Bandwidth broker (BB) 300 is coupled to RAN 110 and core network 120 through communication mediums. BB 300 may be programmed by an operator with instructions to manage the admission control of new flows for mobile IP network 100. More specifically, the operator may generate configurable thresholds and rules to help ensure a network free from congestion. BB 300 may receive link loads from the routers within the network, and in response to the received link loads, generate and send information relating to the link loads for the nodes on the network to the routers. For example, the information may be the link loads for all of the other routers within the network. The information may also be configuration rules for the routers. BB 300 is an optional

element. The nodes within the network may be used to carry out the simple admission control mechanism.

[0022] The operator may set threshold levels to determine whether or not to accept a new flow based on different service classes for a particular user or group of users. As mentioned above, the routers, or a dedicated network element, such as BB 300, may be used for this purpose. For example, conversational traffic from user group A may be carried with an Expedited Forwarding (EF) class would have one threshold level, whereas conversational traffic from user group B carried with an Assured Forwarding (AF) class would have a different service level. The specific user of MS 105 may be differentiated into one of these user groups by the user Mobile Station Integrated Services Digital Network (MSISDN) number that is known to both the SGSN and the GGSN support nodes.

[0023] Furthermore, computers, and other related electronic devices may be connected to network 140 and network 145. The public Internet itself may be formed from a vast number of such interconnected networks, computers, and routers. Mobile IP network 100 may include many more components than those shown in FIGURE 1. However, the components shown are sufficient to disclose an illustrative embodiment for practicing the present invention.

[0024] The media used to transmit information in the communication links as described above illustrate one type of computer-readable media, namely communication media. Generally, computer-readable media includes any media that can be accessed by a computing device. Communication media typically embodies computer-readable instructions, data structures, program modules, or other data in a modulated data signal such as a carrier wave or other transport mechanism and includes any information delivery media. The term "modulated data signal" means a signal that has one or more of its characteristics set or changed in such a manner as to encode information in the signal. By way of example, communication media includes wired media such as twisted pair, coaxial cable, fiber optics, wave guides, and other wired media and wireless media such as acoustic, RF, infrared, and other wireless media.

[0025] FIGURE 2 shows another exemplary system in which the invention operates in which a number of local area networks ("LANs") 220_{a-d} and wide area network ("WAN") 230 interconnected by routers 210. On an interconnected set of LANs--including those based on differing architectures and protocols--, a router acts as a link between LANs, enabling messages to be sent from one to another.

[0026] Communication links within LANs typically include twisted wire pair, fiber optics, or coaxial cable, while communication links between networks may utilize analog telephone lines, full or fractional dedicated digital lines including T1, T2, T3, and T4, Integrated Services Digital Networks (ISDNs), Digital Subscriber Lines (DSLs), wireless links, or other communications

links. Furthermore, computers, such as remote computer 240, and other related electronic devices can be remotely connected to either LANs 220_{a-d} or WAN 230 via a modem and temporary telephone link. The number of WANs, LANs, and routers in FIGURE 2 may be increased or decreased without departing from the spirit or scope of this invention. As such, the Internet itself may be formed from a vast number of such interconnected networks, computers, and routers and that an embodiment of the invention could be practiced over the Internet without departing from the spirit and scope of the invention.

[0027] FIGURE 3 is a schematic diagram that shows an exemplary bandwidth broker that is operative to process information relating to the link loads on the network. Accordingly, BB 300 may receive and transmit data relating to the simple admission control mechanism. For instance, BB 300 may transmit link load data and receive link load data from the components on the IP network.

[0028] BB 300 may include many more components than those shown in FIGURE 3. However, the components shown are sufficient to disclose an illustrative embodiment for practicing the present invention. As shown in FIGURE 3, BB 300 is connected to RAN 110 and core network 120, or other communications network, via network interface unit 310. Network interface unit 310 includes the necessary circuitry for connecting BB 300 to core network 120, and is constructed for use with various communication protocols including the COPS protocol that runs on top of TCP. Other communications protocols may be used, including, for example, UDP protocols. Typically, network interface unit 310 is a card contained within BB 300.

[0029] BB 300 also includes processing unit 312, optional video display adapter 314, and a mass memory, all connected via bus 322. The mass memory generally includes RAM 316, ROM 332, and one or more permanent mass storage devices, such as hard disk drive 328, a tape drive, CD-ROM/DVD-ROM drive 326, and/or a floppy disk drive. The mass memory stores operating system 320 for controlling the operation of BB 300. This component may comprise a general purpose operating system 320 as is known to those of ordinary skill in the art, such as UNIX, LINUX™, or Microsoft WINDOWS NT®. Basic input/output system ("BIOS") 318 is also provided for controlling the low-level operation of BB 300.

[0030] The mass memory as described above illustrates another type of computer-readable media, namely computer storage media. Computer storage media may include volatile and nonvolatile, removable and non-removable media implemented in any method or technology for storage of information, such as computer readable instructions, data structures, program modules or other data. Examples of computer storage media include RAM, ROM, EEPROM, flash memory or other memory technology, CD-ROM, digital versatile disks

(DVD) or other optical storage, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or any other medium which can be used to store the desired information and which can be accessed by a computing device.

[0031] The mass memory also stores program code and data for simple admission control program 330 (See Figures and Related discussion below), and programs 334. Simple admission control program 330 includes computer executable instructions which, when executed by BB 300, help in executing the simple admission control mechanism across the IP based network. BB300 may include a JAVA virtual machine, an HTTP handler application for receiving and handing HTTP requests, JAVA applets for transmission to a WWW browser executing on a client computer, an IPsec handler, a Transport Layer Security (TLS) handler and an HTTPS handler application for handling secure connections. Either the IPsec handler or the TLS handler may be used to provide security protection for the COPS protocol. HTTPS handler application may be used for communication with external security applications (not shown), to send and receive private information in a secure fashion.

[0032] BB 300 may also comprise an input/output interface 324 for communicating with external devices, such as a mouse, keyboard, scanner, or other input devices not shown in FIGURE 3. Likewise, BB 300 may further comprise additional mass storage facilities such as CD-ROM/DVD-ROM drive 326 and hard disk drive 328. Hard disk drive 328 is utilized by BB 300 to store, among other things, application programs, databases, and program data used by simple admission control program 330. For example, link loads, topology of the network, user databases, relational databases, and the like, may be stored.

Simple Admission Control for IP Based Networks

[0033] FIGURE 4 illustrates an overview of a simple admission control process 400, in accordance with aspects of the invention. After a start block, the process moves to block 410 at which point the process monitors for new flows attempting to enter the network. Transitioning to decision block 415, a determination is made as to whether a new flow has arrived. When there is not a new flow, the process returns to block 410 to continue monitoring for new flows. When there is a new flow, the process moves to block 420 at which point the congestion of the path is determined. According to one embodiment of the invention, the link congestion for all of the possible paths from the source to destination of the flow is determined. For each path from the source to destination, a link load for each link within the path is calculated. A link is congested when the link load is larger than a configurable threshold. For example, the link may be congested when the link load is larger than a threshold of 90%. Other thresholds may be chosen. Stepping

to decision block 425, a decision is made as to whether all of the paths the flow may use are congested. When all of the paths are congested, the process steps to block 430 where the new flow is discarded. In other words, the new flow is not accepted by the IP based network. When at least one of the paths is not congested, the process steps to block 435, at which point the new flow is accepted. Transitioning to block 440, the process chooses the path for the new flow. According to one embodiment of the invention, the least congested path is chosen. The path may be chosen using some other method. For example, the path may be chosen on number of hops, shortest distance, or some other parameter. The path may also be chosen based on a class of service. The process then advances to an end block and returns to processing other actions.

[0034] FIGURE 5 shows an exemplary equation for representing link load. The equation: $\text{link load}_i = (1-w) * \text{link load}_{i-1} + w * (8 * \text{bytes per period} / (p * \text{link capacity}))$ is used to calculate link load 510 according to one embodiment of the invention. Weighting parameter "w" 520 is configurable, and according to one embodiment of the invention, is set at 0.5. Weighting parameter "w" 520 relates to how much weight previous link load values are given in the equation. In other words, weighting parameter "w" 520 is set depending on how fast the operator desires the link load value to react to the changes in link loads. Measurement period parameter "p" 530 is the period of time the load for the node is measured. According to one embodiment of the invention, measurement period parameter "p" 530 is 500 milliseconds. Other measurement period parameters may be used. Link capacity 540 is the capacity of the particular link being measured. According to one embodiment of the invention, link capacity is measured in bits per second (bps).

[0035] The link load may be real time load for real time traffic, total load for other traffic, and the like. The link load may be any subset of the total load that is based on the number of bytes dequeued from certain DiffServ router output queues for any traffic class. For example, real time load for Expedited Forwarding (EF) traffic, which is mapped to highest priority queue, may be considered to be congested when the real time load is larger than real time threshold (e.g., $0.8 * \text{link bandwidth}$). Other traffic thresholds may be set at higher thresholds, e.g. $\text{total threshold} = 0.95 * \text{link bandwidth}$.

[0036] FIGURE 6 shows a process for a simple admission mechanism 600 for an IP based network. After a start block, the process moves to decision block 610 where a determination is made as to whether a timer has expired. According to one embodiment of the invention, the link load for each node is calculated at predetermined periods. For example, the timer may be set at 500 milliseconds. When the timer has not expired, the process waits for the timer to expire. When the timer has expired, the process moves to block 620 at which point the link load is calculated. According to one embodiment of the invention, the link load is calculated using the ex-

ponential averaging equation illustrated in FIGURE 5.

[0037] Transitioning to decision block 630, a determination is made as to whether the link load exceeds a predetermined threshold. The link and any path that the link is within is congested when the link load is above the predetermined threshold. The predetermined threshold may be set to many different values. For instance, the threshold may be set at 90% of link capacity. Additionally, more than one threshold may be used to determine when a link is congested. For example, a different threshold may be chosen for each different service class. When the threshold is exceeded, the process steps to decision block 635, at which point a determination is made as to whether a congestion bit is set to indicate that the link is not congested. According to one embodiment of the invention, a bit within the node is set to a value of one when the link is congested and is set to zero when the link is not congested.

[0038] According to another embodiment of the invention, a dedicated network element, such as a bandwidth broker, may maintain the congestion states of the links (See FIGURE 7 and related discussion). Other indicators may be used to represent that a link is congested. At block 635, when the congestion bit is set to not congested, the process transitions to block 640 where a warning message is sent to the other nodes within the network indicating that a particular link is congested. Stepping to block 645, the process sets the congestion bit within the node to indicate that its link is congested. Stepping to block 665, the timer is set. When the congestion bit has already been set to congested, the process moves to block 665 to set the timer. The nodes do not need to be informed that the link is congested when the congestion bit was previously set, as all nodes have already been notified that the link is congested.

[0039] When the threshold load has not been exceeded the process steps to decision block 650 where a determination is made as to whether the congestion bit has been set to congested. When the congestion bit is set, the process transitions to block 655, at which point a link OK message is sent to all hosts. This message informs the other nodes on the network that the link may be used again. At this point in time, the link is no longer congested and may accept new flows. Stepping to block 660, the congestion bit is set to indicate that the node is not congested. Moving to block 665, the timer is set. The process is repeated according to a timed period. The process advances to an end block and returns to processing other actions.

[0040] FIGURE 7 illustrates a simple admission control utilizing a dedicated network element, in accordance with aspects of the present invention. After a start block, the process moves to block 710, at which point link load information is received from a node on the network. Moving to block 720, the path information is updated in response to the received link load. Transitioning to block 730, load information may be sent to the node. The load information may contain many different types of data.

The load information may contain the link loads for each node within the network. The load information may also include routing rules for the nodes.

[0041] The above specification, examples and data provide a complete description of the manufacture and use of the composition of the invention. Since many embodiments of the invention can be made without departing from the spirit and scope of the invention, the invention resides in the claims hereinafter appended.

Claims

1. A method for an admission control mechanism for an IP based network, comprising:

determining when a flow arrives;
calculating a link load for each link within a path from a source to a destination; and
determining when a link within the path is congested; and when a link within the path is congested, rejecting the flow; otherwise, accepting the flow.

2. The method of claim 1, wherein determining when the path is congested further comprises comparing each link load to a predetermined threshold to determine when the path is congested.

3. The method of claim 1 or 2, wherein the link load is represented by an exponential averaging equation.

4. The method of any preceding claim, wherein the network comprises a radio access network (RAN).

5. The method of any preceding claim, wherein calculating the link load for each link within the path from the source to the destination, further comprises:

each node within the path calculating its link load; and
when the link is determined to be congested, ensuring that the other nodes within the network are notified that the link is congested.

6. The method of any preceding claim, further comprising employing a bandwidth broker to determine when the link within the path is congested.

7. The method of claim 3 or any claim dependent on claim 3, further comprising employing a bandwidth broker to determine, according to the link load information received from the network nodes, when the link within the path is congested.

8. The method of claim 3 or any claim dependent on claim 3, wherein the exponential averaging equation is: $\text{link load}_i = (1 - w) * \text{link load}_{i-1} + w * (8 * \text{bytes})$

per period/(p*link capacity)), wherein link capacity is bits per second.

9. An apparatus for an admission control mechanism for an IP based network, comprising:

a processor and a computer-readable medium; a network interface unit arranged to communicate with nodes on the network; and an admission control program executing under the control of an operating system and operative to perform actions, including:

calculating a link load; determining when the link is congested in response to the calculated link load; and providing the state of the congestion of the link to the nodes on the network.

10. The apparatus of claim 9, wherein determining when the link is congested further comprises comparing the link load to a predetermined threshold.

11. The apparatus of claim 9 or 10, wherein the link load is represented by an exponential averaging equation.

12. The apparatus of claim 11, wherein the exponential averaging equation is: $\text{link load}_i = (1 - w) * \text{link load}_{i-1} + w * (8 * \text{bytes per period} / (p * \text{link capacity}))$.

13. The apparatus of any of claims 9 to 12, wherein the IP based network comprises a radio access network (RAN).

14. A system for an admission control mechanism for an IP based network, comprising:

nodes, wherein the nodes include a network interface unit arranged to communicate across the network; and a bandwidth broker that is configured to process information relating to link loads associated with the nodes, wherein the policy server includes:

a network interface unit arranged to communicate with the nodes; and a simple admission control program executing under the control of an operating system and operative to perform actions, including:

receiving a link load from each of the nodes; updating path information relating to the received link load; and sending load information to each of the

nodes.

15. The system of claim 14, wherein the IP based network comprises a radio access network (RAN).

16. The system of claim 14 or 15, wherein updating the path information relating to the received link load, further comprises determining when the path is congested; and when the path is congested, rejecting a flow; otherwise accepting the flow.

17. The system of claim 16, wherein determining when the path is congested further comprises comparing the link load to a predetermined threshold.

18. The system of any of claims 14 to 17, wherein each of the link loads is represented by its respective node and is calculated by an exponential averaging equation.

19. The system of claim 18, wherein the exponential averaging equation is: $\text{link load}_i = (1 - w) * \text{link load}_{i-1} + w * (8 * \text{bytes per period} / (p * \text{link capacity}))$.

20. An apparatus for an admission control mechanism for an IP based network, comprising:

a means for determining when a flow arrives; a means for calculating a link load for each link within a path from a source to a destination; and a means for determining when a link within the path is congested; and when a link within the path is congested, rejecting the flow; otherwise, accepting the flow.

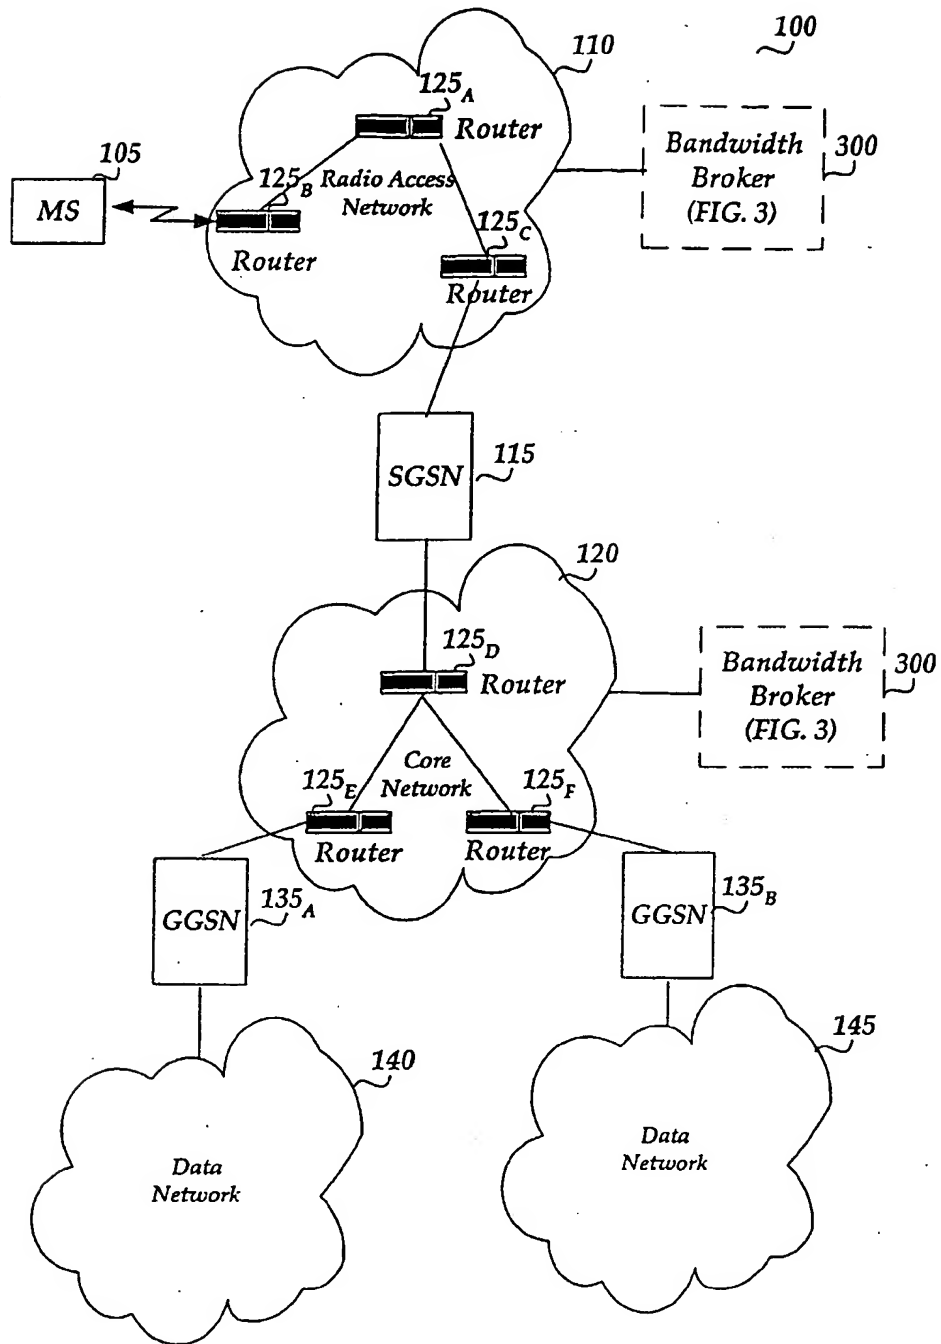


Fig.1

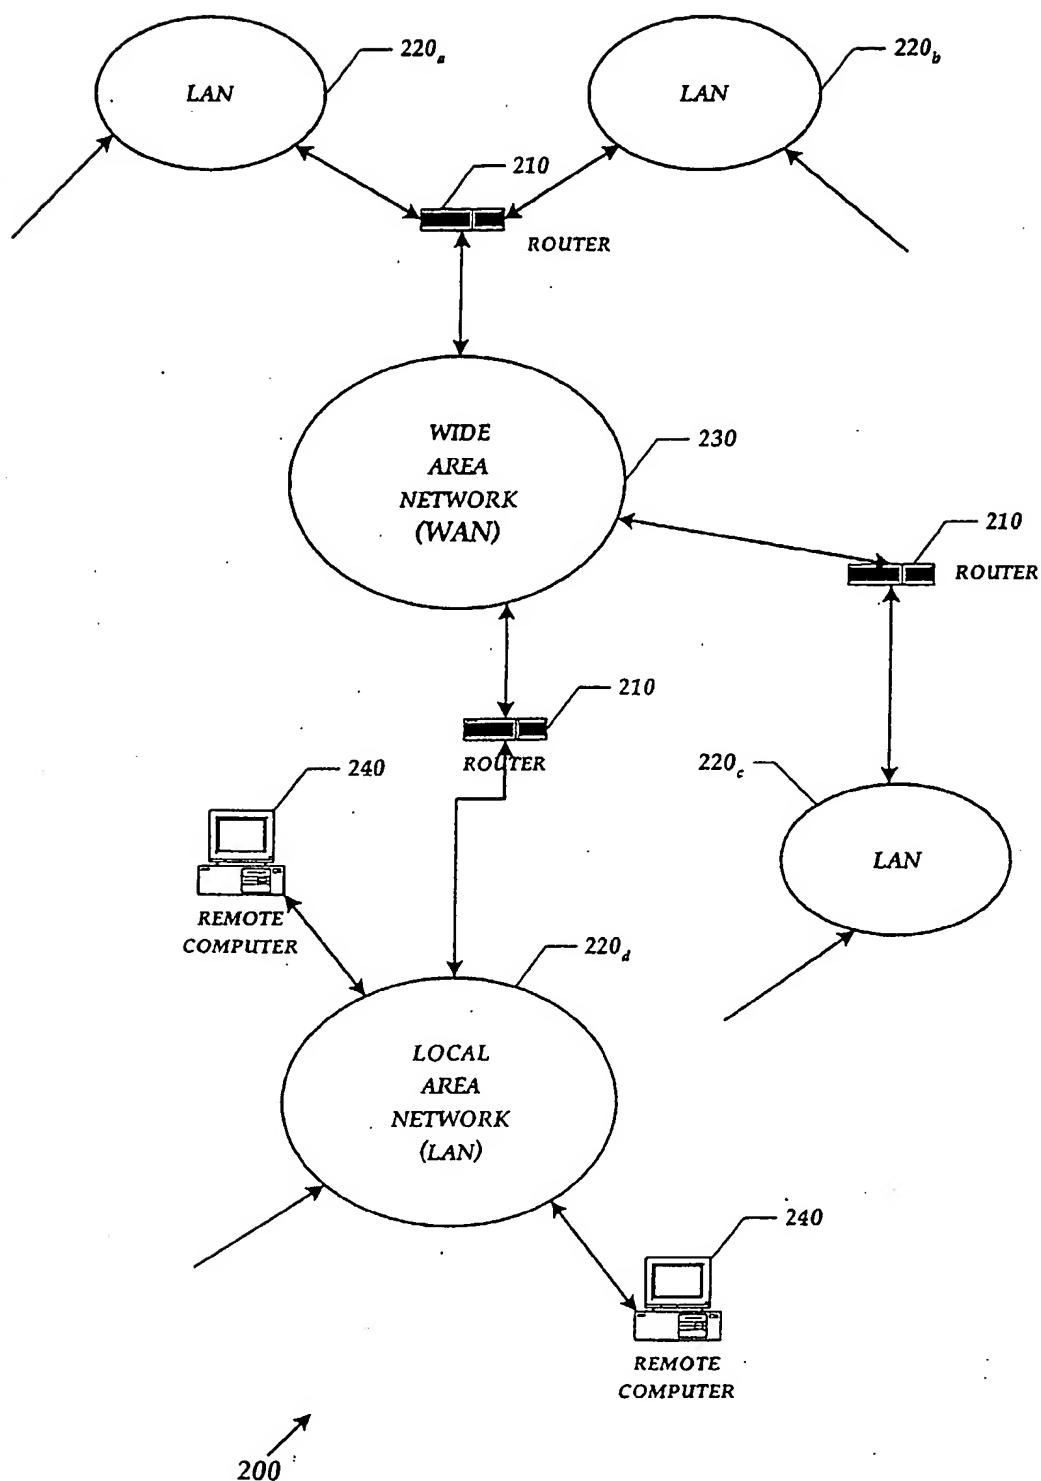


Fig.2

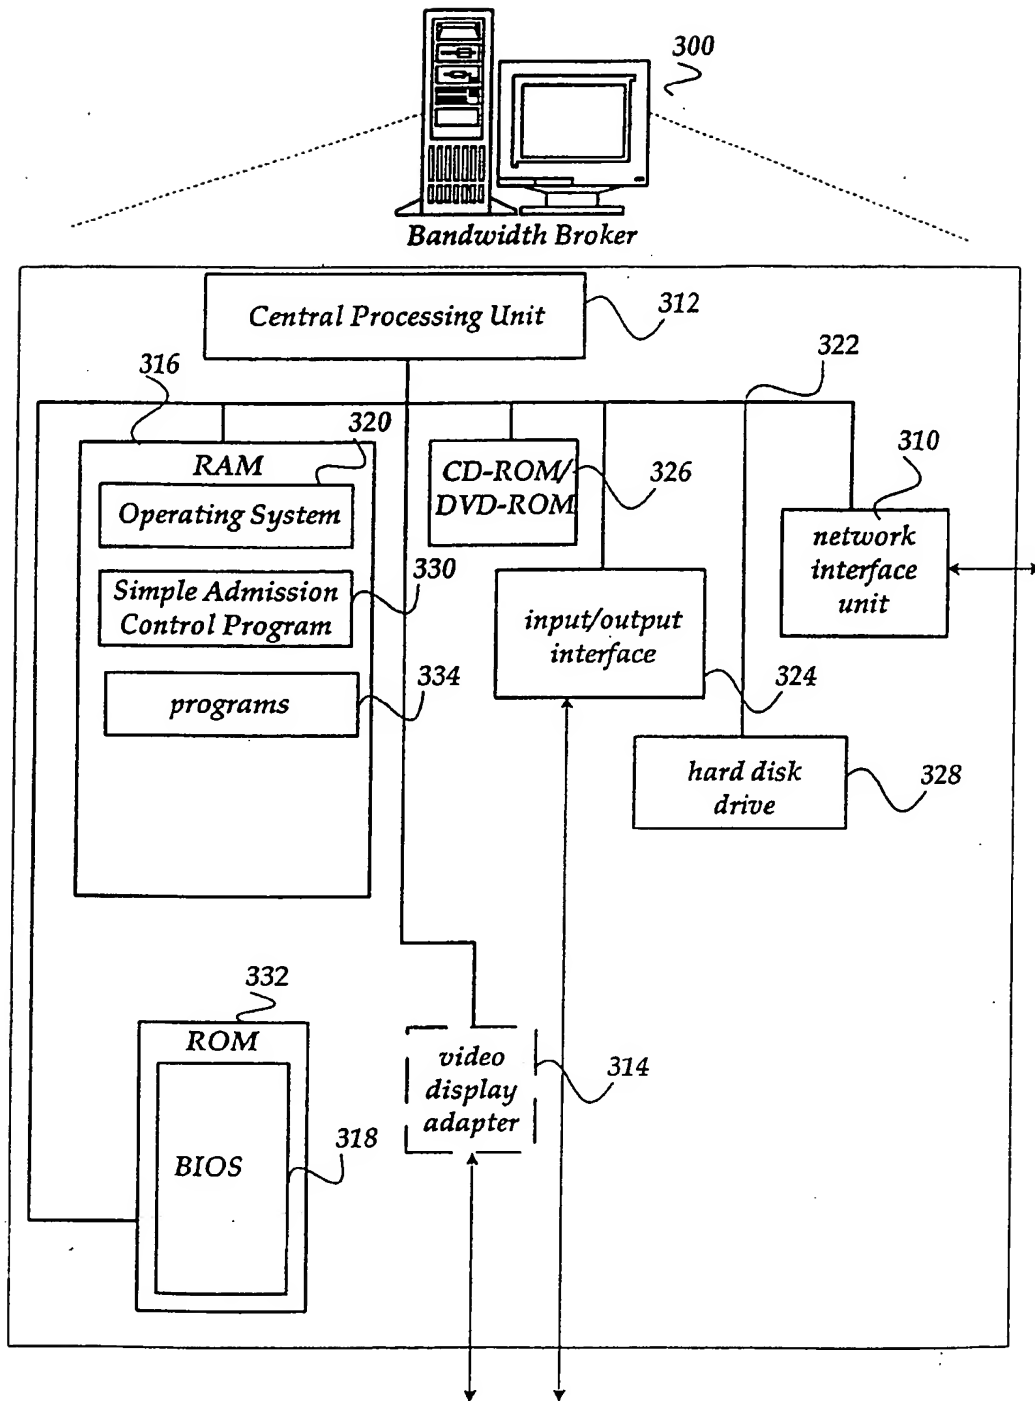
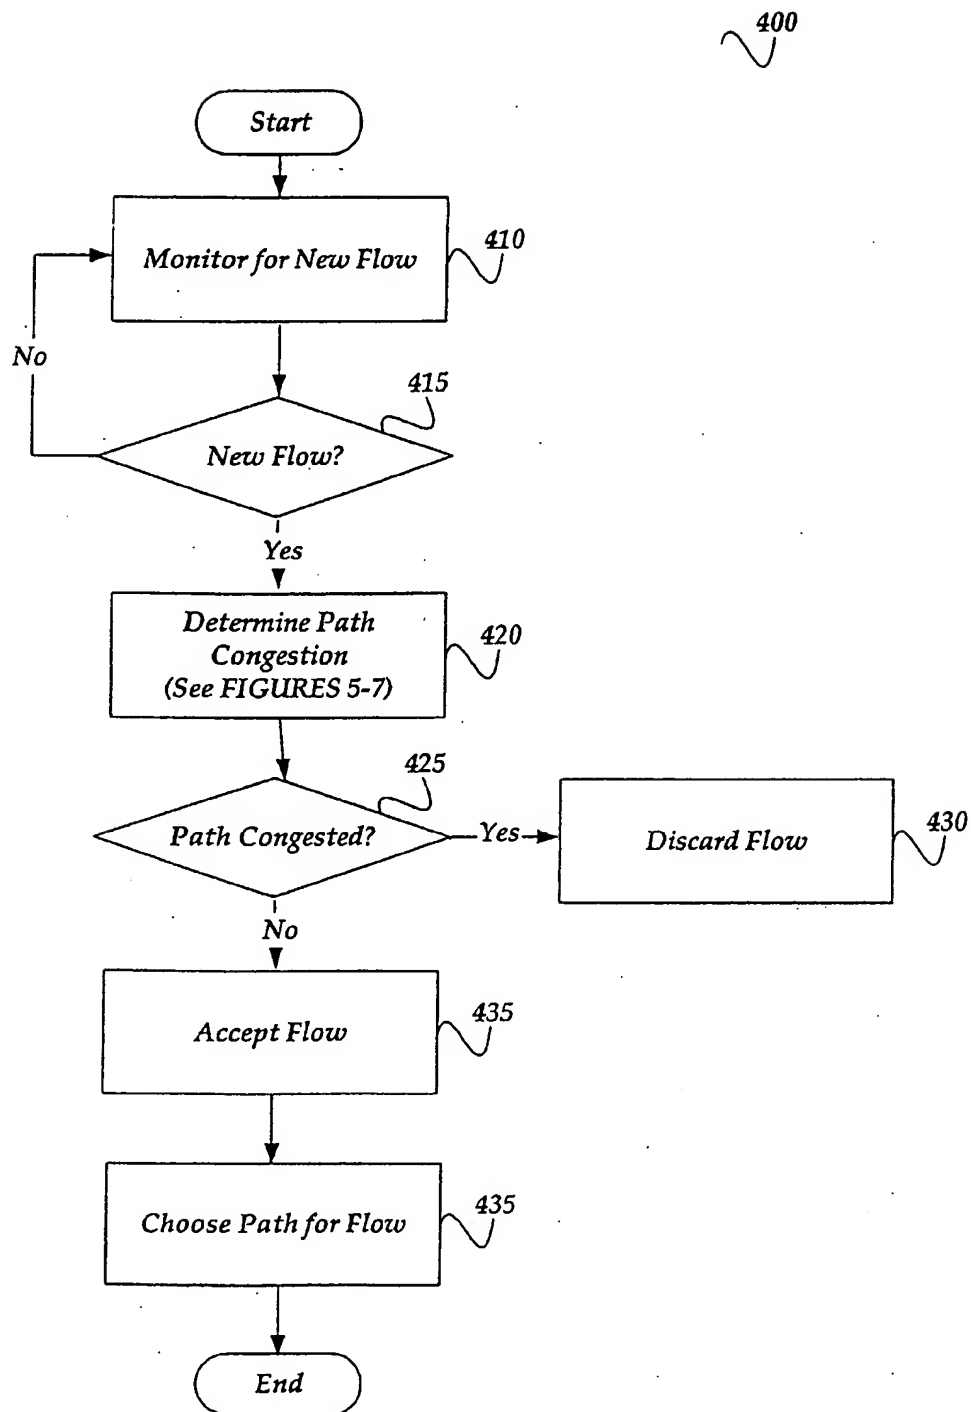


Fig.3

*Fig.4*

$$\overset{510}{\curvearrowright} \quad \overset{520}{\curvearrowright} \quad \overset{530}{\curvearrowright} \quad \overset{540}{\curvearrowright}$$

$$\text{link load}_i = (1 - w) * \text{link load}_{i-1} + w * (8 * \text{bytes per period}_i / (p * \text{link capacity}))$$

w = weighting parameter

p = measurement period parameter

Fig.5


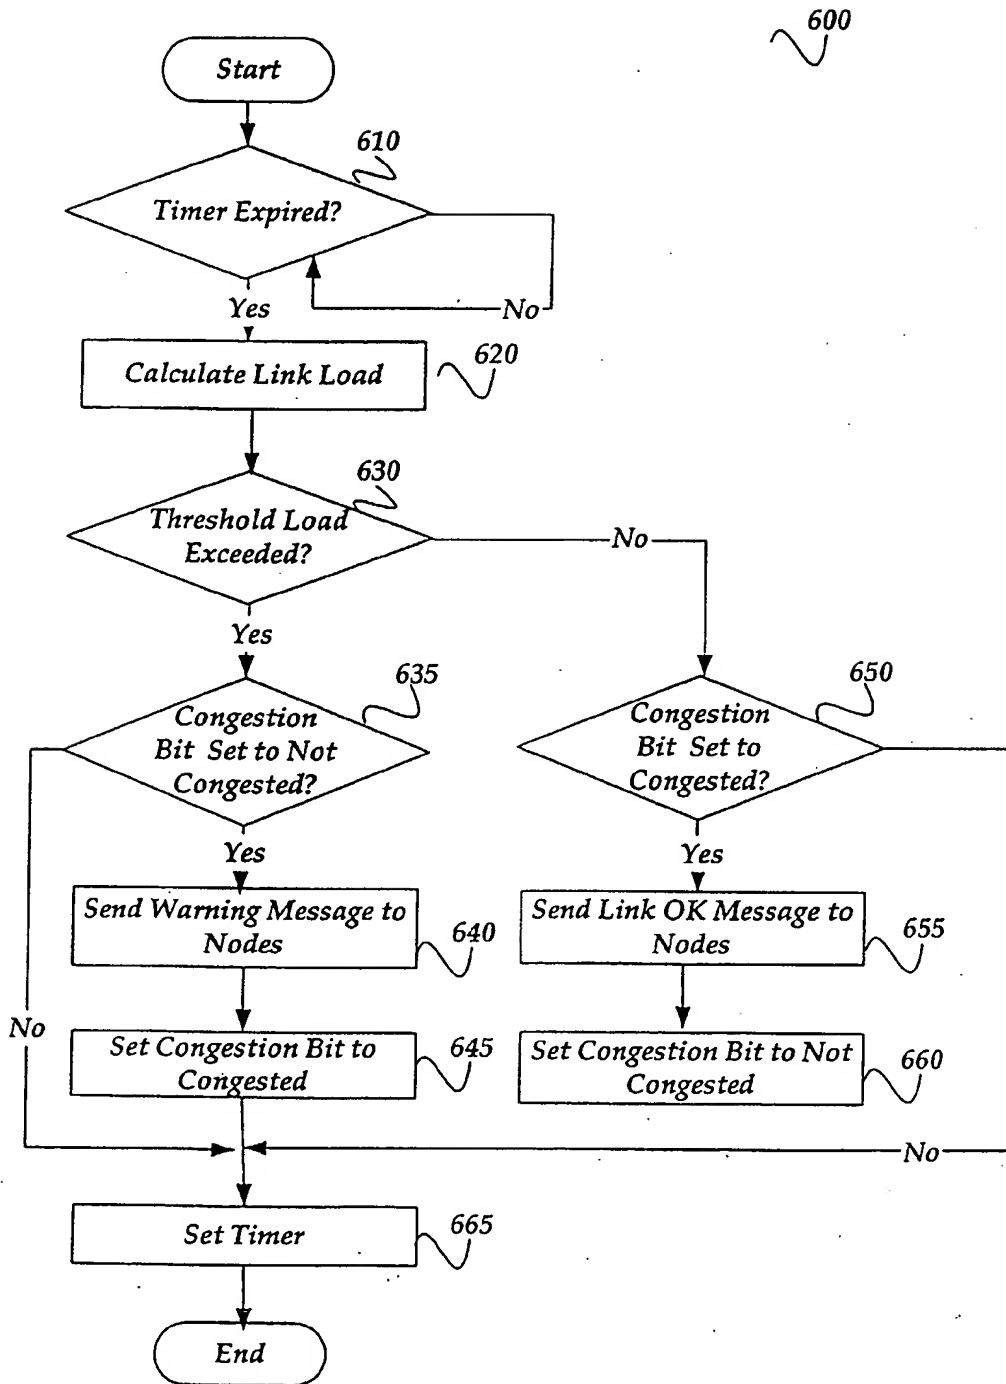


Fig.6

*Fig.7*

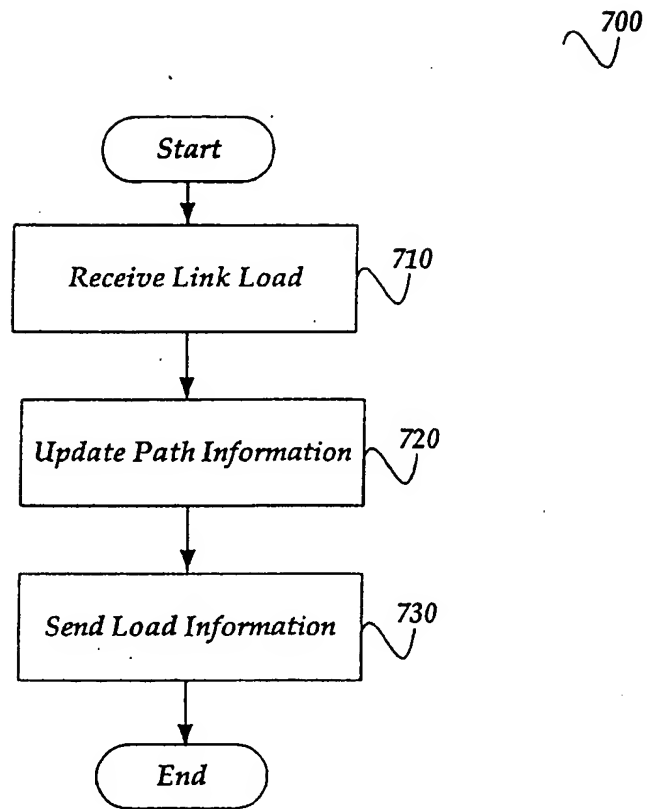

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 25 1763

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 00 30295 A (NORTEL NETWORKS CORP ;CHEN SHENZE (US); FIGUEIRA NORIVAL R (US)) 25 May 2000 (2000-05-25) * page 3, line 25 - page 4, line 25 * * page 9, line 23 - page 11, line 5 * * page 12, line 4 - page 13, line 20 * * page 15, line 24 - page 17, line 25; figures 3A,3B,4 *	1,5-7,9,14	H04L12/56
Y	---	3,11,18	
A		2,10,17	
Y	BRESLAU L ET AL: "Comments on the performance of measurement-based admission control algorithms" INFOCOM 2000. NINETEENTH ANNUAL JOINT CONFERENCE OF THE IEEE COMPUTER AND COMMUNICATIONS SOCIETIES. PROCEEDINGS. IEEE TEL AVIV, ISRAEL 26-30 MARCH 2000, PISCATAWAY, NJ, USA,IEEE, US, 26 March 2000 (2000-03-26), pages 1233-1242, XP010376059 ISBN: 0-7803-5880-5 * page 1233 - page 1235 *	3,11,18	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H04L
X	WO 99 66676 A (TURANYI ZOLTAN ;VERES ANDRAS (HU); ERICSSON TELEFON AB L M (SE)) 23 December 1999 (1999-12-23) * claim 2; figure 5 *	1,20	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 16 June 2003	Examiner Reeck, G
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date O : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 25 1763

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-06-2003

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
WO 0030295	A	25-05-2000	US	6487170 B1	26-11-2002
			AU	1525500 A	05-06-2000
			CA	2351395 A1	25-05-2000
			EP	1138138 A2	04-10-2001
			WO	0030295 A2	25-05-2000

WO 9966676	A	23-12-1999	GB	2338372 A	15-12-1999
			AU	4364699 A	05-01-2000
			CA	2334869 A1	23-12-1999
			CN	1312996 T	12-09-2001
			WO	9966676 A1	23-12-1999
			EP	1086555 A1	28-03-2001
			JP	2002518936 T	25-06-2002

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82